
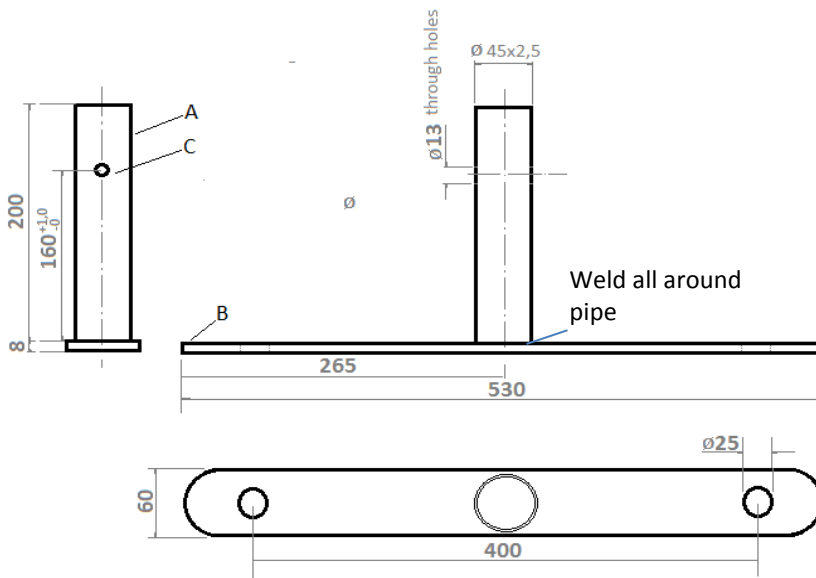


# Pedestrian barrier, "Flat foot"

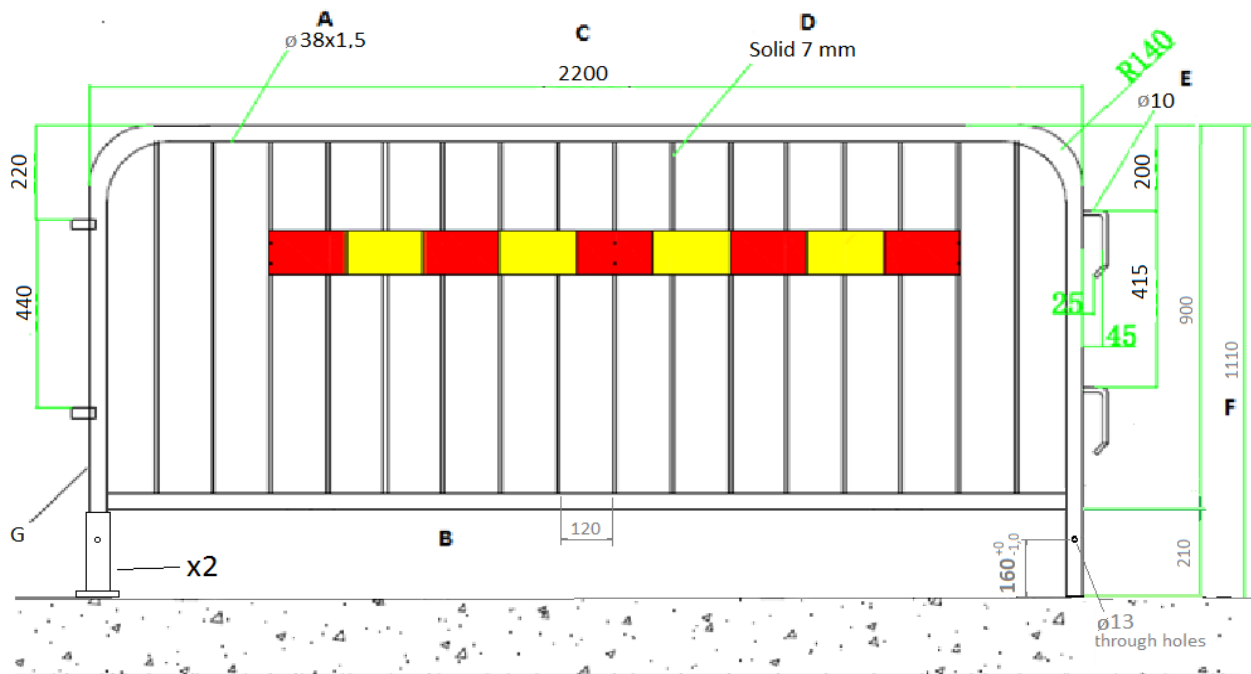

Foot shall be delivered separate to barrier.  
Hot dip galvanized hexagon screw M12x55 mm + nut mounted on foot at delivery.

| BARRIER: | Dimension  | Tolerance | Dimension        | Tolerance |
|----------|--|-----------|------------------|-----------|
| A        | OD 38 mm   | ± 0,3 mm  | Thickness 1,5 mm | ± 0,1 mm  |
| B        | Space 120 mm   | ± 2 mm    |                  |           |
| C        | Length 2 200 mm  | ± 10 mm   |                  |           |
| D        | Diameter 7 mm  | ± 0,1 mm  |                  |           |
| E        | Diameter 10 mm   | ± 0,1 mm  |                  |           |
| F        | Height 1100 mm   | ± 5 mm    |                  | ± 5 mm    |
| G        | Zinc layer average min 55 μm, local thickness down to 45 μm is accepted. |           |                  |           |
|          | Unmarked dimensions  | ± 2 mm    |                  |           |

| FOOT: | Dimension  | Tolerance         | Dimension        | Tolerance         |
|-------|--|-------------------|------------------|-------------------|
| A     | OD 45 mm   | ± 0,3 mm          | Thickness 2,5 mm | ± 0,1 mm          |
| B     | Length 530 mm  | ± 5 mm            | Thickness 8 mm   | + 0,5 mm / - 0 mm |
| C     | Hole 13 mm   | + 0,5 mm / - 0 mm |                  |                   |
|       | Zinc layer average min 55 μm, local thickness down to 45 μm is accepted. |                   |                  |                   |
|       | Unmarked dimensions  | ± 2 mm            |                  |                   |

## Other requirements:

- Barrier shall be straight and stand steadily on flat surface
- Bolt M12 shall easily run through holes when mounting foot
- Barriers shall easily be connected and disconnected to each other
- Zinc surface shall be smooth and without sharp burrs
- Reflex on one side, colour red and yellow
- Foot: Standing pipe shall be centered and in right angle to the flat iron