## ID-Nr. 30657-001 Model G90.205.120



asecos.

| Dimensions  |            |  |
|---|------------|--|
| Width (external)  | 1198.00 mm |  |
| Depth (external)  | 615.00 mm  |  |
| Height (external)   | 2050.00 mm |  |
| Width (internal)  | 1045.00 mm |  |
| Depth (internal)  | 400.00 mm  |  |
| Height (internal)   | 1858.00 mm |  |
| The available internal dimensions can vary depending on the interior equipment package. |            |  |

| Wei | σht  | /1  | nar |   |
|-----|------|-----|-----|---|
| wei | giit | / L | uau | ļ |

| Weight without interior equipment | 610 kg                   |
|-----------------------------------|--------------------------|
| Distributed load                  | 625.00 kg/m <sup>2</sup> |
| Maximum load                      | 600 kg                   |
|                                   |                          |
|                                   |                          |

| venuiation  |   |
|---|---|
| Extraction air  | 75 DN                                   |
| minimum exhaust air quantity 10 times                                 | 8 m³/h                                  |
| minimum exhaust air quantity 120 times                                | 93 m³/h                                 |
| Lead-through possibilities  | 60                                      |
| For further details of the lead-through possibilities and exhaust air | please have a closer look to EN 14470-2 |

| Colouring / Surface finish   |            |
|------------------------------|------------|
| Body colour code             | RAL 7035   |
| Body colour                  | Light grey |
| Body surface finish          | plain      |
| Door / Drawer colour code    | RAL 7035   |
| Door / Drawer colour         | Light grey |
| Door / Drawer surface finish | plain      |
|                              |            |
| General Information          |            |
| x 50-litre gas cylinders     | 4 piece    |
| Door opening angle           | 180.00     |
| Depth with open doors        | 1238 mm    |
| Customs tariff number        | 94032080   |





## Gas cylinder cabinet G-ULTIMATE-90 Model G90.205.120, in light grey (RAL 7035)

Safe and approved storage of flammable or toxic gases in working areas – for up to 4 x 50-litre gas cylinders


## **Function / construction:**


- No unauthorised use: doors lockable with profile cylinder (integration in an existing locking system possible)
- easy alignment: adjusting aids to compensate for uneven floor
- easy mounting of connecting pipes and gas fittings: large interior height (1890 mm), many lead-through possibilities on the top of the cabinet
- ventilation: integrated air ducts ready for connection (DN 75) to a technical exhaust, even ventilation inside the cabinet
- tested and certified: according to the stricter GS principles


## Available equipment:

- Comfort interior equipment complete with mounting rails, rolling ramp (L = 350 mm) with pneumatic damper, cylinder retainer and matching tension belts
- standard interior equipment complete with mounting rails, rolling ramp, cylinder retainer and matching tension belts
- cylinder retainer variable installation in the cabinet, flexibly adjustable in depth, across the entire width of the cabinet
- sateral cylinder retainer for two 10-litre cylinders, alternatively in height adjustable version (no tools required)

Front view

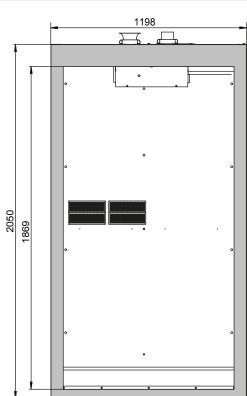

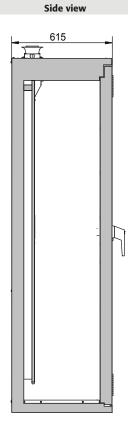



For further information please visit www.asecos.com