


TOP CLEAN TREND XL 22

WITH RIBBED CARPET AND BRUSH STRIP

Continuously enhancing the Top Clean TREND[®] series, we now provide this version with broad aluminium profiles. It is best applicable in large-sized, architecturally ambitious entrance areas. Ribbed carpet elements with 37 mm width and cassette brushes provide optimal dirt collection and walking comfort.



| | |
|-----------------------|-----------|
| Mat height: | ca. 22 mm |
| Profile width: | 37 mm |
| Profile width add-on: | 11 mm |
| Profile distance: | ca. 5 mm |
| Frame height: | 25 mm |

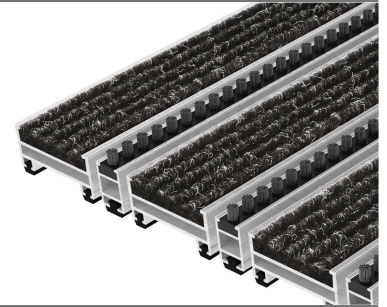

Clean-off zone



Usage



Trafficability



Properties



MATERIAL











| | |
|-------------------|--|
| Aluprofile | Warp resistant aluminium profile (alloy EN AW 6060) |
| Upper | Heavy Duty Ribbed Carpet: UV-resistant heavy-duty polypropylene alternating with Brush Strips made of robust polyamide 6 |
| Underside | Base of the mat is mechanically fitted with rubber inserts for anti-slip and noise reduction |
| Connection | Coated galvanized wire rope |
| Lock | Special threaded nipple with stainless steel screw (rust-proof) |

TECHNICAL SPECIFICATIONS

| | |
|---|--|
| Mat height | ca. 22 mm |
| Profile width | 37 mm |
| Profile width add-on | 11 mm |
| Profile distance | ca. 5 mm |
| Automatic door systems | Profile spacing optional also in 3 mm for automatic door systems conforming to DIN 18650 |
| Wall thickness | up to 1,5 mm |
| Weight | 13,8 kg / m ² |
| Frame height | 25 mm |
| Max. profile length in one piece | 300 cm |
| Max. weight in one piece | 50 kg |
| Special shapes | Can be custom-made to your specifications (at an extra charge) |
| Mat division | Standard: as of a profile length of 300 cm or weight of 50 kg – Mat divisions into a profile length and weight according to customer requirements are possible |



PRODUCT INFORMATION

| | | | |
|--|---|---|---|
| Suitable Traffic¹ | Trafficability² | Static load³ | Load per wheel⁴ |
|  medium |  800 kg |  5.000 kg |  220 kg |
| Dirt absorption | Moisture absorption | Slip resistance | Fire behaviour |
|  high |  high |  Ribbed Carpet R11 |  Ribbed Carpet Cfl-s1 (on request) Brush Strip Bfl-s1 (on request) |
| Warranty⁵ | REACH⁶ | | |
|  10 years |  REACH-compliant | | |

Areas of application⁷

- Object areas
- Public areas
- Private areas

ACCESSOIRES

ACCESSOIRES.LABEL

| | |
|-------------------------------|---|
| SPEZIAL Angle Frame 25 | Aluminium, 25 x 25 x 3 mm |
| SPEZIAL Angle Frame 25 | Stainless Steel, 25 x 20 x 3 mm, with rounded edges |
| T-Bar 25 | Aluminium, 25 mm |

SERVICE

OPTIONAL (ON SITE, FOR AN ADDITIONAL CHARGE)


- Building site advice
- Measurement using digital measuring device
- Fitting and laying service
- Disposal of used mats
- Repairs/replacement of insert types following wear
- Cleaning

COLOURS

Heavy Duty Ribbed Carpet




010 Anthracite
Heavy Duty Ribbed Carpet




020 Light Grey
Heavy Duty Ribbed Carpet




030 Mottled Beige
Heavy Duty Ribbed Carpet




040 Mottled Blue
Heavy Duty Ribbed Carpet



050 Green
Heavy Duty Ribbed Carpet



060 Blue
Heavy Duty Ribbed Carpet



070 Red
Heavy Duty Ribbed Carpet




080 Sand
Heavy Duty Ribbed Carpet




090 Brown
Heavy Duty Ribbed Carpet



100 Blue-Grey
Heavy Duty Ribbed Carpet



110 Mauve
Heavy Duty Ribbed Carpet



120 Blue-Violet
Heavy Duty Ribbed Carpet



130 Black
Heavy Duty Ribbed Carpet


Brush Strip



410 Black
Brush Strip























420 Grey
Brush Strip



430 Blue
Brush Strip

Colour deviations cannot be ruled out for technical reasons.

RIBBED CARPET PROPERTIES

| | | |
|--|---|--|
|  Total height: up to 11 mm |  Application fields (DIN 66095): extreme |  Slip resistant characteristics to DIN 51130: R11 |
|  Total weight: up to 3,000 g/m ² |  Rollable |  Low-emission to RAL-ZU 128: E1 |
|  Fibre: 100% Polypropylen |  Heat conductive |  Anti-Static < 2 kV |
|  Material design: Cut-loop |  Sound absorbing |  Colour fastness against light ISO 105 B02: good 6 |
|  Pile weight: up to 1,700 g/m ² |  Fire rating to DIN EN 13501-1: Cfl-s1 (Heavy Duty Ribbed Carpet on re...) |  Colour fastness against friction ISO 105 X12: good |
|  Backing: SBR-Latex impregnation |  Suitable für wheel chairs |  Colour fastness against water ISO 105 E01: good 5 |
|  Suitable for heavy traffic |  Suitable for chair castor to DIN 54324 | |

Technical changes and errors excepting.

- 1) Normal: used on foot up to approx. 2,800 times, medium: approx. 2,800 times or more, strong: approx. 5,100 times or more per day.
- 2) Suitable for a customary lift truck (tandem rollers) up to the specified total weight.
- 3) The static load tests to establish the load-bearing capacity of our entrance mats have been performed on a testing machine able to conduct tests with a load of up to 100 t, using a 10 × 10 cm (=100 cm²) pressure vessel. Mats with Brush Strips or Scraper Bars are only suitable for wheeled items to a limited extent. It is vital to avoid accelerating, braking or manoeuvring on the mats!
- 4) The specified loads refer to a polyurethane wheel with a diameter of 85 mm and width of 100 mm. When investigating our entrance matting systems, we simulated the point load that is applied to the mat by a single roller. To obtain the overall load, this value can be multiplied by the number of rollers that the means of transportation has.
- 5) Production and material defect warranty. The warranty depends on the manner of application, installation, and regular cleaning and maintenance in accordance with the recommendations of GEGGUS. All warranties are subject to our Terms of Sale and Supply. These can be found on the Internet at www.geggus.de.
- 6) GEGGUS products do not contain, in a concentration of more than 0.1%, any substances that are currently considered to be of very high concern (SVHC) and that are included on the candidate list.
- 7) When assessing the requirements for a particular application, the performance features of the individual mat types should be taken into account.