

# WS-Wood acoustic panels



# WS-Wood acoustic panels

Our wooden panels are not only aesthetically pleasing, they also have very good properties when it comes to sound and acoustic dampening properties. With a core of MDF or plywood that is coated with wood veneers from the market's widest range and surface treatment that can be obtained in many different variants, such as clear lacquer in different gloss levels, as well as stains and pigmentations in color, all of course carried out with water-based varnishes, there is guaranteed something that suits you. We use a proven profile system of simple and quick assembly (concealed assembly).

## WS - WOOD ACOUSTIC PANEL

WS-Wood Acoustic panels is part of the Wallsystems by Glimåkra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

## TECHNICAL INFORMATION

Surface layer	Veneer
Material	12 mm MDF or plywood
Edging	Tracked for hidden profile system or straight edge.
Surface treatment standard	Water-based UV varnish.
Surface treatment special	Large selection, contact customer support
Thickness	13 mm.
Standard sizes	2400x600mm, 2400x1200mm 2960x600mm, 2960x1200mm.
Other sizes	On request
Assembly	Concealed profile system or with recessed visible screws.
Manufacturing	Glimåkra

## SUSTAINABILITY


WS-Wood Acoustic panels uses only wood for veneers from sustainably managed forests.

## FIRE PROPERTIES

Standard range:	D-klass
FR (FR=fireclass):	B-s1,d0 eller B-s2,d0

## ACOUSTICS - SOUND TEST


The results are presented according to DS/EN ISO 11654:1997 including the size of the graphs. Mounting with 45mm mineral wool and battens behind the panels.

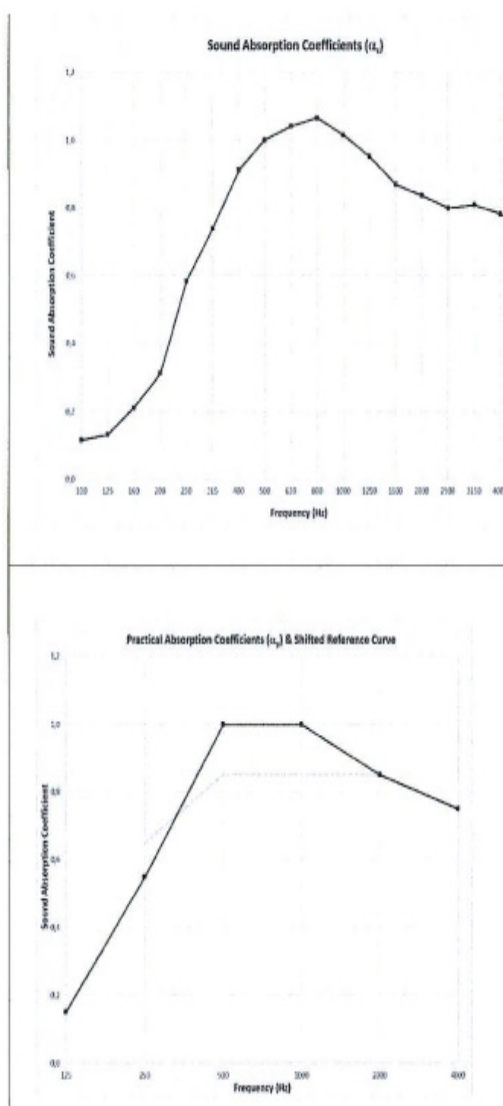




# WS-Wood acoustic panels


## OUR STANDARD RANGE



WS-Wood Acoustic panels  
Diamond Ash. Perforering 1



WS-Wood Acoustic panels  
Diamond Ash. Perforering 2




WS-Wood Acoustic panels  
Diamond Ash. Perforering 3




WS-Wood Acoustic panels  
Diamond Ash. Perforering 4




WS-Wood Acoustic panels  
Diamond Ash. Perforering 5



WS-Wood Acoustic panels  
Diamond Oak. Perforering 1



WS-Wood Acoustic panels  
Diamond Oak. Perforering 2




WS-Wood Acoustic panels  
Diamond Oak. Perforering 3




WS-Wood Acoustic panels  
Diamond Oak. Perforering 4




WS-Wood Acoustic panels  
Diamond Oak. Perforering 5




WS-Wood Acoustic panels  
Diamond Walnut. Perforering 1



WS-Wood Acoustic panels  
Diamond Walnut. Perforering 2



WS-Wood Acoustic panels  
Diamond Walnut. Perforering 3



WS-Wood Acoustic panels  
Diamond Walnut. Perforering 4



WS-Wood Acoustic panels  
Diamond Walnut. Perforering 5



WS-Wood Acoustic panels  
Black Diamond Ash. Perforering 1



WS-Wood Acoustic panels  
Black Diamond Ash. Perforering 2



WS-Wood Acoustic panels  
Black Diamond Ash. Perforering 3




WS-Wood Acoustic panels  
Black Diamond Ash. Perforering 4



WS-Wood Acoustic panels  
Black Diamond Ash. Perforering 5


# WS-Wood acoustic panels

## PERFORATIONS

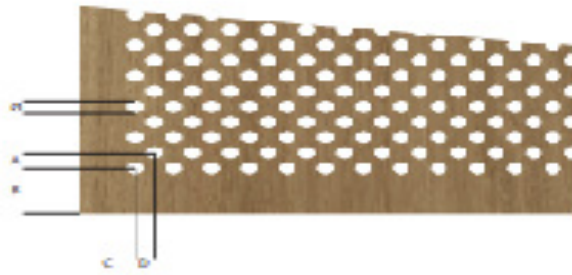


Perforation 1

A = 8mm  
B = 30mm  
C = 30 mm  
D = 8mm  
Ø = 8mm

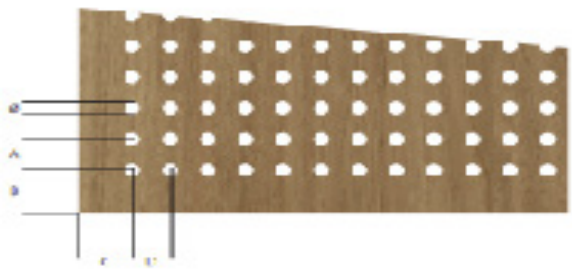


Perforation 2

A = 16mm  
B = 30mm  
C = 30 mm  
D = 16mm  
Ø = 8mm

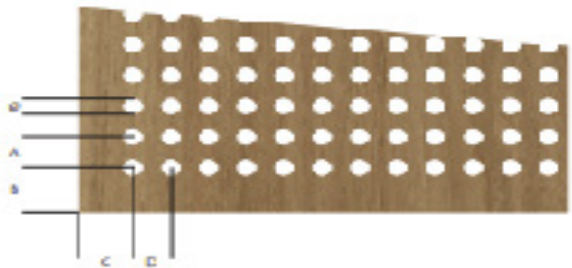

Perforation 3

A = 16mm  
B = 30mm  
C = 30 mm  
D = 16mm  
Ø = 10mm

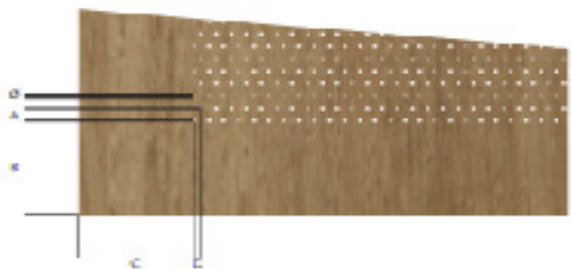

Perforation 4

A = 4mm  
B = 30mm  
C = 30 mm  
D = 2mm  
Ø = 1mm



Perforation 5

A = 1,8mm  
B = 30mm  
C = 30 mm  
D = 1,8mm  
Ø = 0,5mm



# WS-Wood acoustic panels

